


Skyline 2E

Easy and convenient vertical height adjustment makes this ladder ideal for use to access very great heights.

Product description

- A high level of stability thanks to extra-wide bottom ladder (490 mm).
- Very easy and convenient rung-by-rung height adjustment in a 280 mm grid via synthetic rope and roller.
- Locks securely thanks to automatic spring loaded pawls.
- Top ladder section fitted with wall wheels.
- Wheel assemblies with abrasion-resistant surfaces that will not damage the wall.
- High strength, non-twist rung/stile connections.
- Replaceable 2-component plastic end caps ensure secure positioning without the risk of slipping.

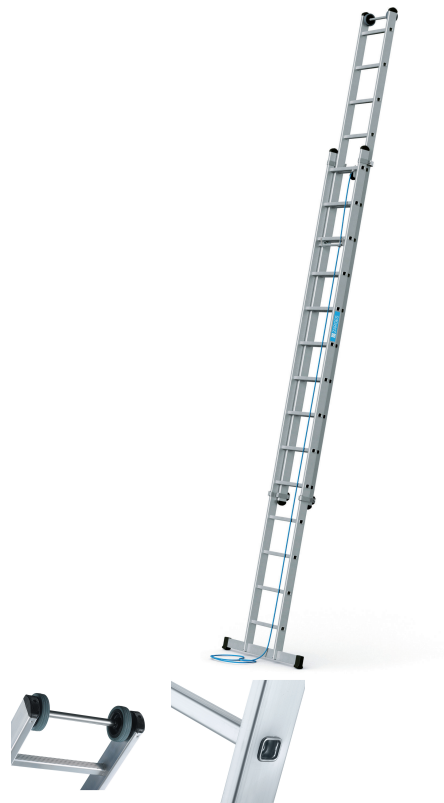

Product features

Coating: natural
 Connection Stile-Rung: flanged
 External width of lower ladder: 490 mm
 Load: max. 150 kg
 Material: Aluminium
 Pitch rung/tread: 270 mm
 Producttype: Flanged rope-operated ladder with rungs, 2-section
 Tread depth: 30 mm
 Type rung/tread: serrated
 Wheels: Rubber
 Wide crosspiece: 1.2 m

Hints and special features

Convenient rung-by-rung height adjustment, with wall wheels that will not damage the wall.
 Complies with EN 131 Professional.

Product variants

Order number	Number of rungs	Number of rungs	Overall length, extended	Overall length, retracted	Stile depth	Stile depth	Transport dimensions	Weight	Working height
40206	14	2 × 14	7.21 m	4.14 m	73 mm	73mm	approx. 4.150 mm × approx. 520 mm × approx. 160 mm	22.821 kg	7.9 m
40207	16	2 × 16	8.33 m	4.7 m	98 mm	98mm	approx. 4.670 mm × approx. 520 mm × approx. 200 mm	24.723 kg	9 m
40208	18	2 × 18	9.13 m	5.2 m	98 mm	98mm	approx. 5.200 mm × approx. 520 mm × approx. 200 mm	30.929 kg	9.75 m
40209	20	2 × 20	10.25 m	5.74 m	114 mm	114mm	approx. 5.740 mm × approx. 520 mm ×	33.832 kg	10.85 m



Order number	Number of rungs	Number of rungs	Overall length, extended	Overall length, retracted	Stile depth	Stile depth	Transport dimensions	Weight	Working height
							approx. 220 mm		
40212	22	2 × 22	11.1 m	6.4 m	114 mm	114mm	approx. 6.410 mm × approx. 520 mm × approx. 220 mm	37.936 kg	11.7 m
40210	24	2 × 24	12.22 m	6.9 m	114 mm	114mm	approx. 6.910 mm × approx. 520 mm × approx. 220 mm	42.641 kg	12.75 m